
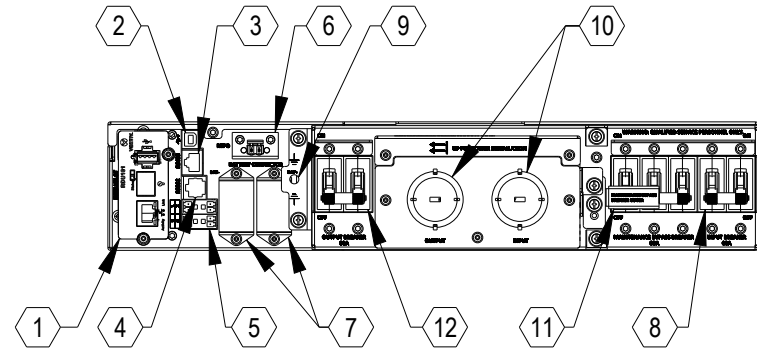



2

1

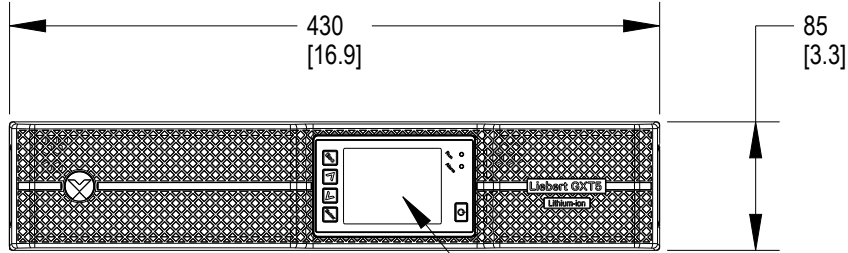

FRONT VIEW FOR DETAIL SEE DRAWING GXT5-DISPLAY

REAR VIEW

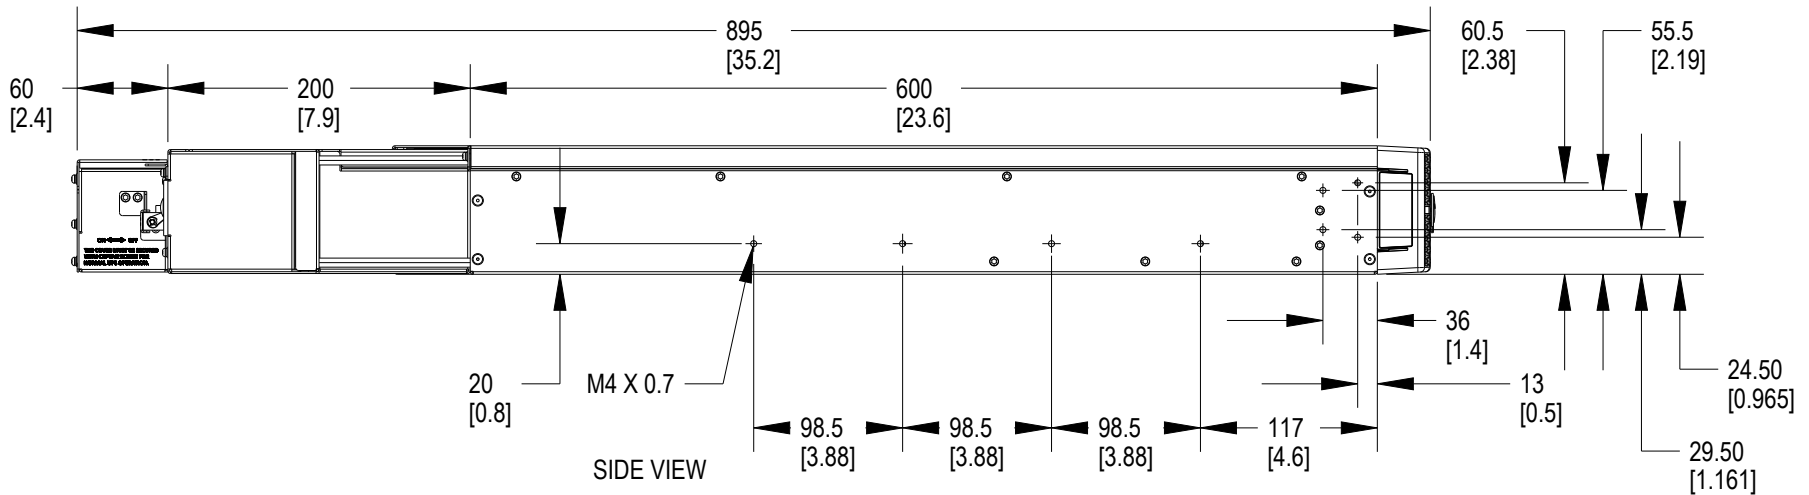

20 [0.8]

M4 X 0.7

SIDE VIEW

98.5 [3.88]

98.5 [3.88]

98.5 [3.88]

117 [4.6]

36 [1.4]

13 [0.5]

24.50 [0.965]

29.50 [1.161]

- 1 INTELLISLOT PORT
- 2 USB PORT
- 3 EXTERNAL BATTERY CABINET COMMUNICATION PORT (RS485)
- 4 RS232 PORT
- 5 TERMINAL BLOCK COMMUNICATION
- 6 REPO
- 7 EXTERNAL BATTERY CONNECTORS
- 8 60A INPUT CIRCUIT BREAKER
- 9 GROUND SCREW
- 10 HARDWIRED INPUT/OUTPUT POWER CONNECTIONS
- 11 60A MAINTENANCE BYPASS CIRCUIT BREAKER
- 12 60A OUTPUT CIRCUIT BREAKER

NOTES

1. UNIT DIMENSIONS (WxDxH) 430mm x 895 mm x 85mm (2U) (16.9" x (35.2") x (3.3"))
2. UNIT WEIGHT WITH EBCS 70.9kg (156.3lbs)
3. UNIT WEIGHT WITHOUT EBCS: 26.9kg (59.3lbs)
4. SHIPPING DIMENSIONS (WxDxH) 798mm x 999mm x 739mm (31.4" x (39.3") x (29.1"))
5. SHIPPING WEIGHT 112.4kg (247.7lbs)
6. MINIMUM AIRFLOW CLEARANCE IS 100mm (4.0") FRONT AND REAR.

SHEET NO. 1 OF 1	DRAWN BY: BAPIN N	TITLE OUTLINE DRAWING LIEBERT GXT5 LITHIUM-ION 8000/10000VA 120/208 VAC RACK/TOWER UPS
CO. NO. -	DESIGNED BY: P BENNER	
REF DWG. -	APPROVED BY: N SECORD	

DWG. NO. GXT5LL_8K_10KMVRT4UXLLN	DATE (LATEST REV.) 8/01/2022
REVISION 0	
1050 DEARBORN DR P.O. BOX 29186 COLUMBUS, OH 43229	






2

1

2

1

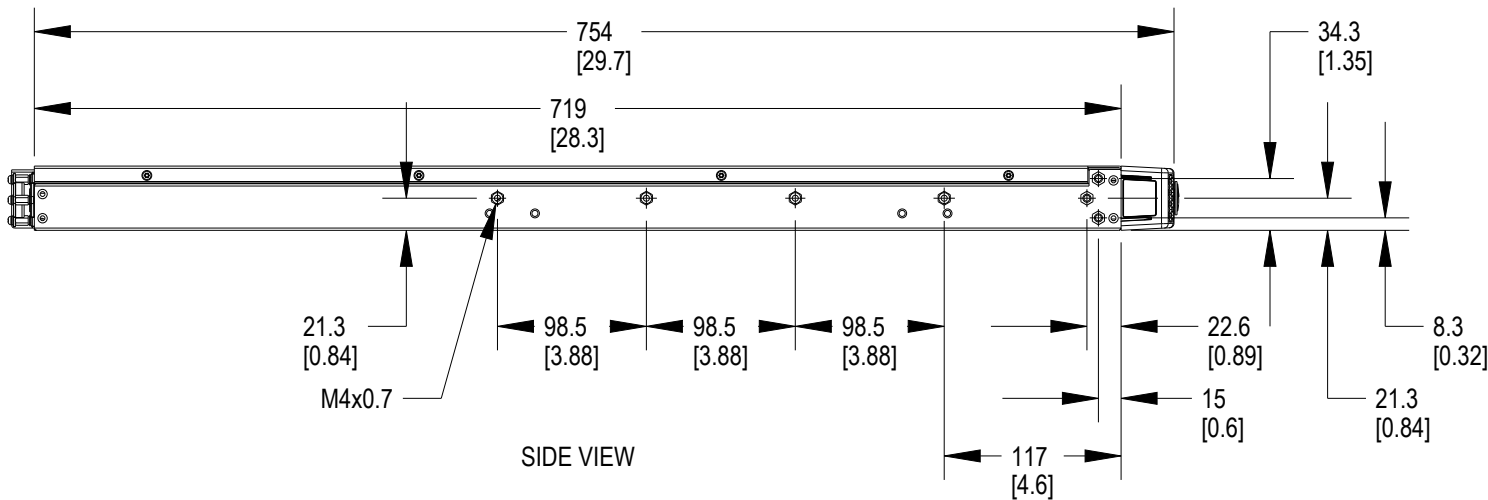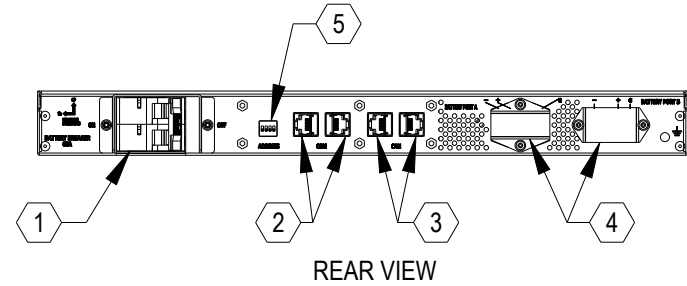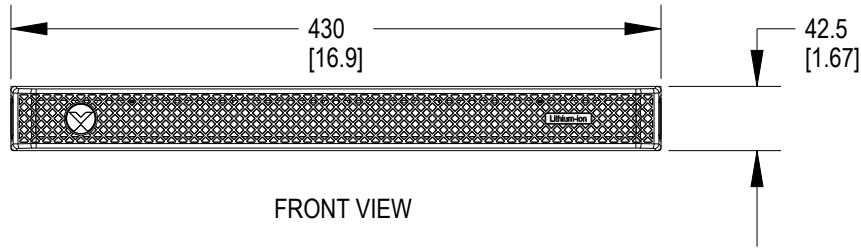

- ① OUTPUT CIRCUIT BREAKER (63A)
- ② EXTERNAL BATTERY CABINET COM PORTS
- ③ EXTERNAL BATTERY CABINET CAN PORTS
- ④ EXTERNAL BATTERY CABINET POWER CONNECTORS
- ⑤ ADDRESS DIP SWITCH

NOTES

- 1. UNIT DIMENSIONS (WxDxH) 430mm x 754mm x 42.5mm (1U)
(16.9") x (29.7") x (1.7")
- 2. UNIT WEIGHT: 22kg (48.5lbs)
- 3. SHIPPING DIMENSIONS (WxDxH) 800mm x 1000mm x 285mm
31.4" x 39.3" x 11.2"
- 4. SHIPPING WEIGHT 48.5kg (106.9lbs)
- 5. MINIMUM AIRFLOW CLEARANCE IS 100mm (4.0")
FRONT AND REAR.

SHEET NO. 1 OF 1	DRAWN BY: AVINASH PATIL
CO. NO. -	DESIGNED BY: P BENNER
REF DWG. -	APPROVED BY: N SECORD

OUTLINE DRAWING LIEBERT GXT5 LITHIUM-ION 5-10kVA 192V EXTERNAL BATTERY CABINET	DWG. NO. VEBCLI-192VRT1U
	DATE (LATEST REV.) 10-AUG-22
	REVISION 0

1050 DEARBORN DR P.O. BOX 29186 COLUMBUS, OH 43229
--






2

1

2

1

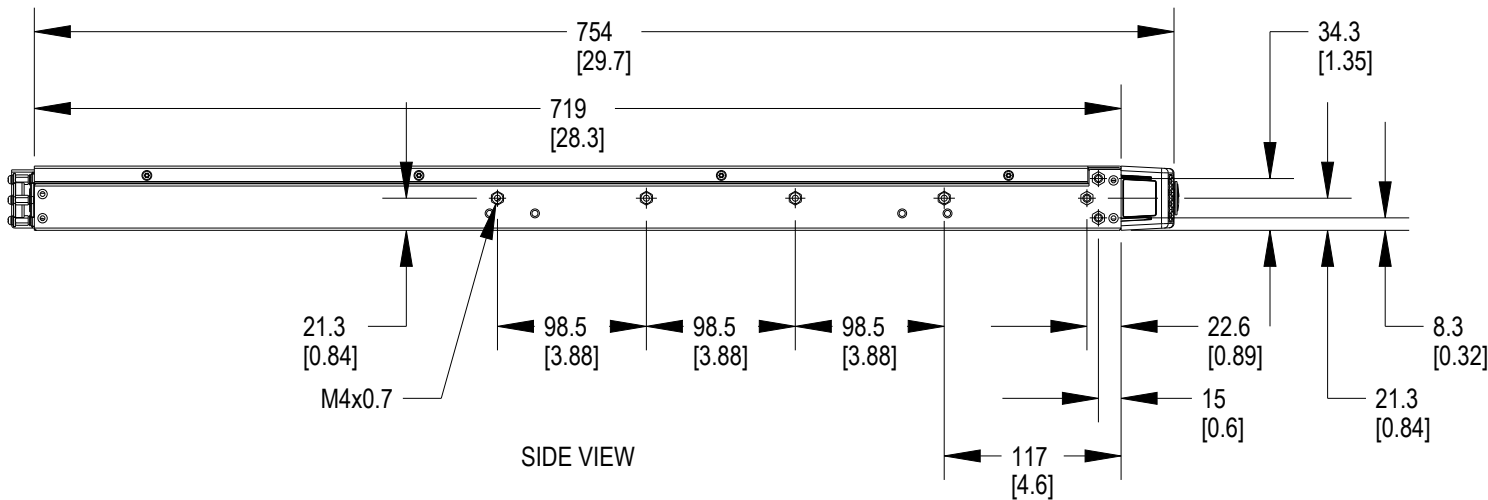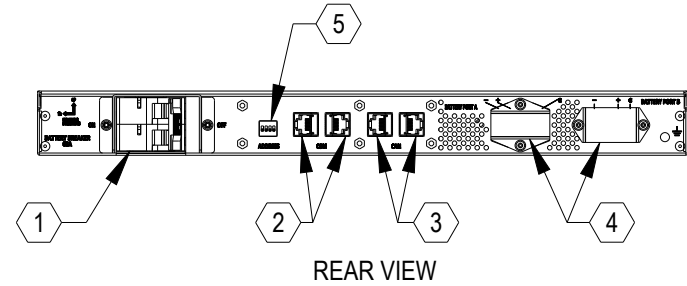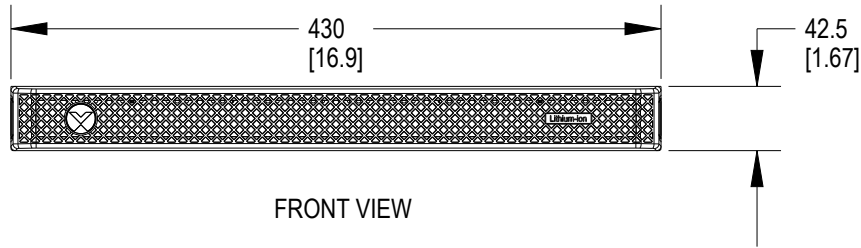

- ① OUTPUT CIRCUIT BREAKER (63A)
- ② EXTERNAL BATTERY CABINET COM PORTS
- ③ EXTERNAL BATTERY CABINET CAN PORTS
- ④ EXTERNAL BATTERY CABINET POWER CONNECTORS
- ⑤ ADDRESS DIP SWITCH

NOTES

- 1. UNIT DIMENSIONS (WxDxH) 430mm x 754mm x 42.5mm (1U)
(16.9") x (29.7") x (1.7")
- 2. UNIT WEIGHT: 22kg (48.5lbs)
- 3. SHIPPING DIMENSIONS (WxDxH) 800mm x 1000mm x 285mm
31.4" xx 39.3" x 11.2"
- 4. SHIPPING WEIGHT 48.5kg (106.9lbs)
- 5. MINIMUM AIRFLOW CLEARANCE IS 100mm (4.0")
FRONT AND REAR.

B

B

A

A

SHEET NO. 1 OF 1	DRAWN BY: AVINASH PATIL
CO. NO. -	DESIGNED BY: P BENNER
REF DWG. -	APPROVED BY: N SECORD

OUTLINE DRAWING LIEBERT GXT5 LITHIUM-ION 5-10kVA 192V EXTERNAL BATTERY CABINET	DWG. NO. VEBCLI-192VRT1U
	DATE (LATEST REV.) 10-AUG-22
	REVISION 0

1050 DEARBORN DR P.O. BOX 29186 COLUMBUS, OH 43229
--



2

1